

marantz®




SR6013 9.2CH 4K ULTRA HD AV RECEIVER WITH HEOS

The Marantz SR6013 offers nine channels of power amplification and 11.2 channel processing and pre-outs. This premium AV receiver supports multi-dimensional audio formats such as Dolby Atmos, DTS:X and DTS Virtual:X. The Marantz SR6013 also delivers superb musical playback from multiple sources, including built-in HEOS.

Highlights

- 9.2 channel AV receiver with 110 W per channel (8 Ohm, 20 Hz - 20 kHz, 0.08% 2ch Drive)
- 8 HDMI inputs (incl. 1 front) with full HDCP 2.2 support; 3 HDMI outputs
- Analog to HDMI conversion and full rate 4K upscaling
- 4K/60 Hz full-rate pass-through, Dolby Vision compatibility, HDR, HLG and BT.2020
- Three-dimensional audio formats Dolby Atmos, DTS:X (up to 7.1.4 with an external 2ch amplifier) and DTS Virtual:X for height virtualization effects
- eARC (Enhanced Audio Return channel) supports the transmission of 3D audio from your TV apps with a single HDMI connection
- Stream music from Internet Radio, Spotify Connect, Pandora, SiriusXM, Amazon Music, TIDAL, Deezer and more with Bluetooth, Airplay2 or HEOS built-in
- Built-in Wi-Fi with 2.4GHz/5GHz dual band support
- Enjoy multi-room whole-home audio streaming with HEOS technology
- Amazon Alexa voice control via the HEOS Home Entertainment skill
- Marantz 2016 AVR remote app for control over the latest generation of Marantz network AV Receivers. Available on iOS and Android.
- High-resolution DSD (2.8/5.6MHz), FLAC, ALAC and WAV support
- AKM AK4458 32-bit D/A converters, HDAM circuit boards and Current Feedback circuitry for optimum fidelity and maximum dynamic range
- Suite of Audyssey room correction software: Audyssey MultEQ XT32, Dynamic Volume and Dynamic EQ, LFC and Sub EQ HT
- Seamless out-of-the-box experience with Quick Start Guide, guided Setup Assistant and Marantz AVR Remote app
- Hybrid PLL Clock Jitter Reducer for pristine sound that's immune to disruptions in the surrounding circuit environment

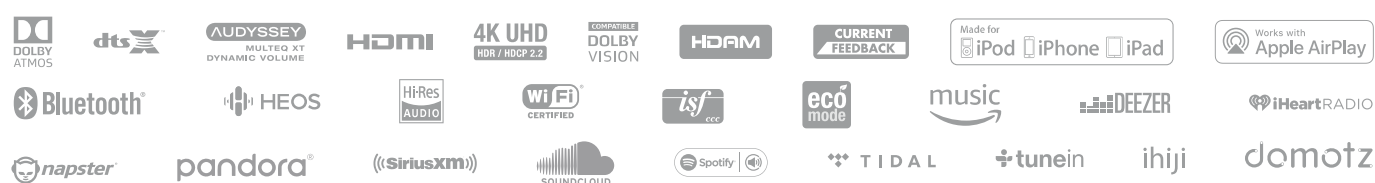

because music matters

SR6013

9.2CH 4K ULTRA HD AV RECEIVER WITH HEOS



Design and specifications are subject to change by Marantz without notice.

FEATURES	SR6013
MULTICHANNEL SURROUND	
DTS HD Master / DTS:X / DTS Neural:X	o / o / o (11ch)
DTS Virtual:X	o
Dolby TrueHD / Dolby Atmos / Dolby Surround	o / o / o
Auro-3D / Auromatic	- / -
Multichannel stereo	o
Max number of processing (preamp) channels	11.2
Audyssey	MultEQ XT32 with LFC/Sub EQ HT
Audyssey Dynamic EQ / Dynamic Volume	o / o
Compressed audio enhancer: MDAX2	o
NETWORK	
HEOS Multi-room streaming / Network audio streaming	o / o
Lossy formats: MP3 / WMA / AAC	o / o / o
Lossless formats: FLAC / ALAC / WAV	o / o / o
FLAC HD 192/24 / WAV 192/24 / ALAC 192/24	o / o / o
DSD audio streaming	up to DSD5.6
Gapless playback	o (FLAC, WAV, ALAC, DSD)
AirPlay audio streaming	o (AirPlay2 via FW update)
Internet Radio (TuneIn)	o (TuneIn)
Spotify connect / Deezer / TIDAL / Napster / Pandora / SiriusXM	o / o / o / o / o / o
Compatible with Remote app (iOS/Android)	Marantz 2016 AVR Remote
Ethernet / Wi-Fi	o / o (dual antenna/ dual band)
Bluetooth	o
HDMI	
4K 60Hz 4:4:4 resolution / HDCP 2.2	o / o
eARC (Enhanced Audio Return Channel)	o
Analog to HDMI scaling	480i/576i up to 4K 60/50
HDMI to HDMI scaling	up to 4K 60/50
GUI overlay on HDMI	o
HDR / HLG / Dolby Vision	o (HDR10) / o / o
3D signal pass-through	o
HDMI pass-through in standby mode	o

* This feature is not available in all countries.

MULTIROOM / CI	
HEOS multi-room integrated	o
Multi-room zones	2
Zone audio source: HDMI / Opt, Coax / Network, USB / Analog	o (2ch) / o (2ch) / o / o
IP Control / RS232 Control / Web Control / App Control	o / o / o / o
Domotz Pro / IHJI	o / o
INPUTS/OUTPUTS	
VIDEO	
Composite in/out	3+1 / 1
Component in/out	2 / 1
HDMI in/out	7+1 / 3 (2 main + 1 Zone)
AUDIO	
Analog in/out	5+1 / -
Phono (MM) in	o
Digital In: Optical / Coaxial	2 / 2
Multi-Room Out: Analog / Digital	1 / -
Multichannel pre-out	o (11.2)
Subwoofer out	2 (independant)
7.1 Multichannel input	o
OTHER	
Speaker terminal: gold-plated screw/regular screw	o / -
SPECIFICATIONS	
Number of poweramps	9
Number of speaker terminals	11
Power output (8 ohm, 20 Hz - 20 kHz, 0.08% 2ch drive)	110 W
Power output (8 ohm, 20 Hz - 20 kHz, 0.05% 2ch drive)	-
Power output (6 ohm, 1 kHz, 10% 1ch drive)	220 W
GENERAL	
System remote control	RC035SR
Power consumption in W	680
Power consumption no-sound (ECO on / off) in W	60 W / 100 W
Standby consumption in W	0.2 (with CEC 0.5)
Maximum dimensions w/o antenna: (W x D x H) in mm	17.3 x 15.3 x 6.3
Weight in lbs	28.2
UPC	
SR5013/U1B	Black
	699927201654

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by D&M Holdings Inc. is under license. Dolby, Dolby Atmos, and the double-D symbol are trademarks of Dolby Laboratories. DTS, the Symbol, DTS in combination with the Symbol, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries. The Spotify software is subject to third party licenses found here: www.spotify.com/connect/third-party-licenses. Other trademarks and trade names are those of their respective owners. Marantz is a trademark or registered trademark of D&M Holdings, Inc.

* All specs can be subject to change.